


OPzV SERIES-TUBULAR GEL

4OPzV200 (2V200Ah)

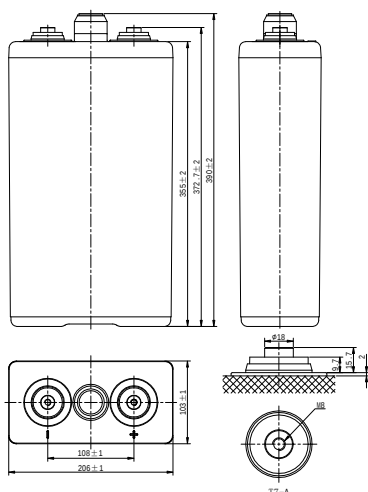

CHARACTERISTICS

Item	Specifications	
Rated Voltage	2V	
Nominal Capacity (25°C)	C ₁₀ , 1.80V/cell	200Ah
Dimension	Length	103mm (4.06inches)
	Width	206mm (8.11inches)
	Container Height	355mm (14.0inches)
	Total Height	390mm (15.4inches)
Approx Weight	18.8kg (41.4lbs)	
Terminal	T7-A(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1600A	
Internal Resistance (25°C)	Approx 1 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.23-2.27V/cell	2.40-2.45V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F)	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)											
F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	89.4	60.4	47.8	32.9	22.9	20.2	9.35	4.88	3.52	2.67	2.30
1.80V/cell	100.2	66.2	53.0	37.2	25.7	22.4	9.95	5.22	3.75	2.81	2.43
1.75V/cell	104.2	68.5	54.2	37.9	26.1	22.7	10.0	5.34	3.84	2.86	2.46
1.70V/cell	108.7	70.2	55.2	38.4	26.5	23.0	10.2	5.44	3.89	2.91	2.49
1.67V/cell	111.6	71.4	56.3	39.1	26.8	23.3	10.3	5.50	3.92	2.96	2.53
1.60V/cell	113.3	72.5	56.9	39.4	27.0	23.4	10.3	5.56	3.94	2.99	2.56
Constant Power Discharge (Watts/cell) at 25°C (77°F)											
F.V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	169.9	115.8	92.4	64.1	45.1	40.0	18.6	9.74	7.04	5.35	4.62
1.80V/cell	189.9	126.6	102.3	72.4	50.7	44.3	19.8	10.4	7.49	5.62	4.88
1.75V/cell	194.3	130.4	104.1	73.6	51.4	44.8	19.8	10.6	7.67	5.72	4.93
1.70V/cell	201.9	133.0	105.7	74.4	51.8	45.2	20.1	10.8	7.74	5.80	4.99
1.67V/cell	206.7	134.9	107.6	75.5	52.3	45.7	20.3	10.9	7.80	5.89	5.04
1.60V/cell	207.1	136.3	108.2	75.8	52.5	45.8	20.4	11.0	7.82	5.95	5.10

OPzV SERIES-TUBULAR GEL

4OPzV200 (2V200Ah)



APPLICATIONS

- Float charging applications: communication center, telecom basestation, UPS, power station, electric substation
- Solar and wind energy storage system
- Off-grid and bad-grid hybrid sites


GENERAL FEATURES

- 20 year design life (20°C)
- Strong Lead-calcium alloy tubular plate technology - for longer life in the toughest conditions
- Gelled electrolyte for superior thermal management, long float life
- Proof against deep discharge - greater long-term energy delivery
- Exceptional cycling performance - 2500+ cycles at 60% Depth of Discharge


STANDARDS

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Approved
- Manufactured in DESA, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Charge Voltage vs Ambient Temperature Curve

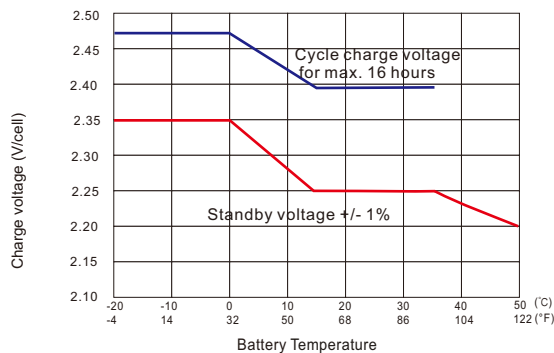

Temperature Effects in Relation to Capacity

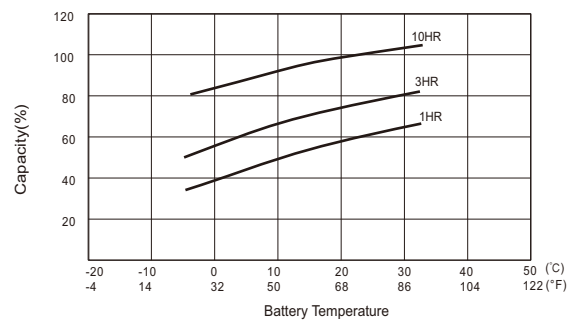

Cycle life

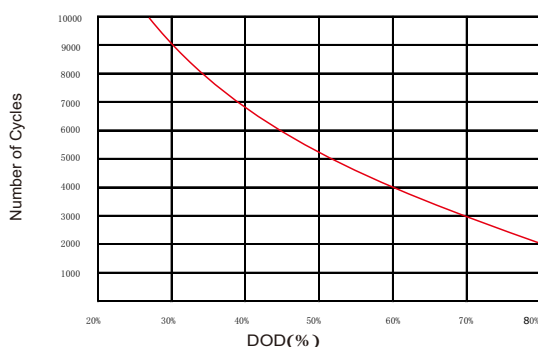

Self Discharge Characteristics

