


LHT SERIES-HIGH TEMPERATURE

LHT12-100 (12V100Ah)

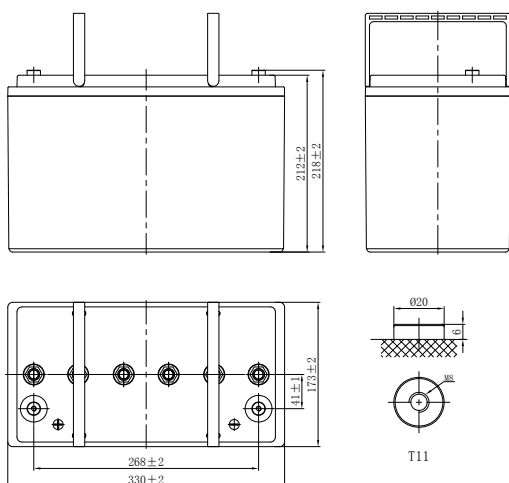

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (35°C)	$C_{10}, 1.80V/cell$	100Ah
Dimension	Length	330mm (13.0inches)
	Width	173mm (6.81inches)
	Container Height	212mm (8.35inches)
	Total Height	218mm (8.58inches)
Approx Weight	33.5kg (73.9lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 V-0)	
Short-circuit current	2000A	
Internal Resistance (35°C)	Approx 8 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-40~65°C (-40~149°F)
	Charge	-20~45°C (-4~113°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±10°C (77±18°F)	
Max.Charging Current (35°C)	0.25C	
Charge voltage (35°C)	Float Charge	Equalization Charge
	2.23-2.27V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	35°C (95°F)	100%
	0°C (32°F)	86%
Self Discharge	LHT series batteries can be stored for up to 6 months at 35°C (95°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 35°C (95°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	72.4	55.9	47.8	31.0	23.3	19.1	16.0	14.1	11.3	9.69	5.17
1.80V/cell	78.6	60.3	50.5	33.3	25.0	20.3	17.0	14.9	11.9	10.0	5.35
1.75V/cell	85.5	65.7	55.0	34.6	26.0	21.0	17.4	15.4	12.3	10.3	5.49
1.70V/cell	93.3	70.8	58.2	36.5	27.4	21.9	18.4	16.1	12.8	10.7	5.63
1.67V/cell	98.5	74.9	60.2	37.8	28.5	22.8	19.0	16.7	13.2	11.0	5.80
1.60V/cell	105.1	77.9	62.0	38.8	29.2	23.3	19.4	17.0	13.4	11.2	5.89
Constant Power Discharge (Watts/cell) at 35°C (95°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	139.4	108.5	93.2	60.7	45.8	37.7	31.8	27.9	22.5	19.4	10.3
1.80V/cell	149.2	116.1	97.8	64.8	49.0	39.8	33.5	29.4	23.6	20.0	10.7
1.75V/cell	160.8	125.5	106.1	67.2	50.7	41.0	34.2	30.3	24.3	20.5	10.9
1.70V/cell	174.6	134.7	112.0	70.6	53.3	42.8	36.1	31.7	25.3	21.2	11.2
1.67V/cell	182.7	141.2	115.0	72.8	55.2	44.3	37.1	32.7	26.1	21.8	11.6
1.60V/cell	193.6	146.0	117.8	74.3	56.4	45.2	37.9	33.3	26.5	22.2	11.7

LHT SERIES-HIGH TEMPERATURE

LHT12-100 (12V100Ah)



APPLICATIONS

- Tele-communication base station
- High temperature station without air-condition
- Station in the open air
- Electric power system, UPS
- Solar energy, wind saving energy power supply


GENERAL FEATURES

- Design life up to 10 years at 35°C
- Specifically formulated heat resistant plastic case and cover optimizes compression, resists bulging and meets safety requirements (UL 94 V-0)
- Unique alloy inhibits corrosion under the highest temperature extremes
- Puncture resistant micro-porous glass mat separators extend life
- Epoxy-sealed posts eliminate leaks


STANDARDS

- Compliance with IEC 60896 Certified
- Classified as "Long Life" according to Eurobat
- UL, CE Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

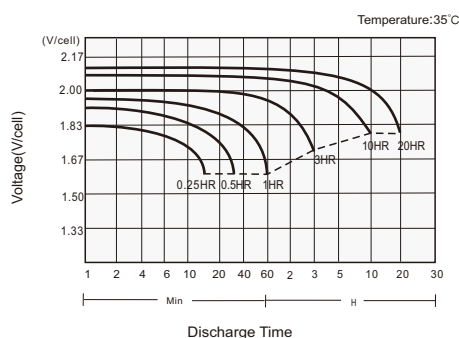

Charging Characteristics

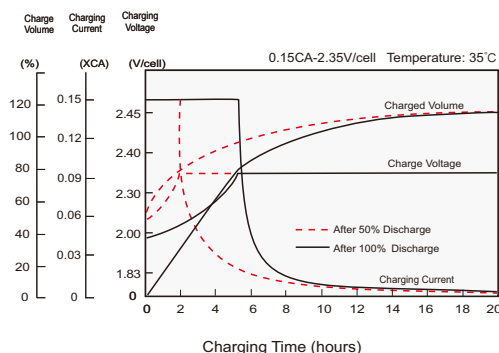

Temperature Effects in Relation to Battery Capacity

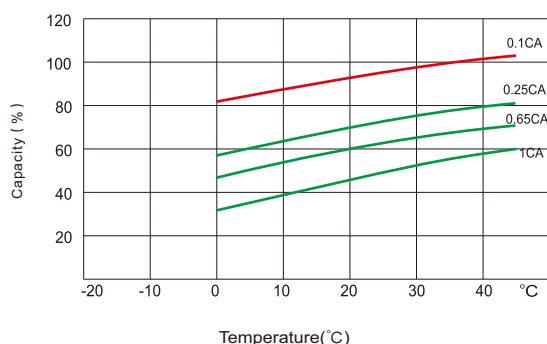

Self Discharge Characteristics

